

**Conditioned  
Steam Humidifiers**

industrial processes  
office buildings  
printing  
hospitals  
warehouses



Armstrong



**Armstrong**<sup>®</sup>  
Intelligent System Solutions™  
STEAM · AIR · HOT WATER

# Electrically-Operated “On-Off” Unit Humidifiers

(physical data, dimensions and capacities)



## With Fan.

For direct discharge into atmosphere of area humidified at steam supply pressures from 0,15 to 4 bar. Solenoid valve turns steam on and off. Integral fan with oilless motor provides rapid, uniform distribution of moisture.

## Without Fan.

For direct discharge into atmosphere of area humidified at steam supply pressures from 0,15 to 4 bar. Solenoid valve turns steam on and off. Generally used in parallel with unit heaters.

Figure 57-1. FSA humidifiers


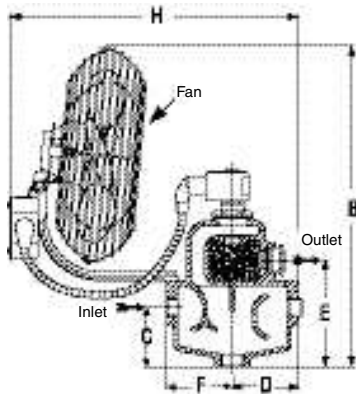


Figure 57-2. VSA humidifiers

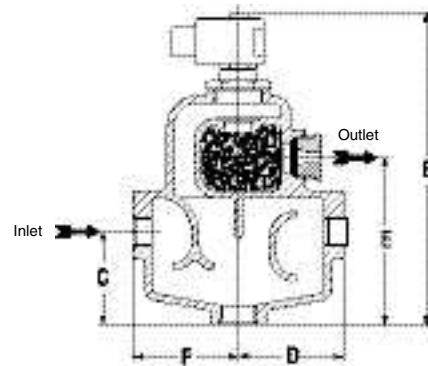

Model N°	B	C	D	E	F	H
FSA-91	472	86	97	154	400	78
FSA-92	472	86	97	154	400	97
FSA-93	533	117	121	229	464	121

Model N°	B	C	D	E	F
VSA-91	276	86	97	154	78
VSA-92	276	86	97	154	97
VSA-93	368	117	121	229	121

Model Number	FSA-91	VSA-91	FSA-92	VSA-92	FSA-93	VSA-93
*Coil (watts) 120V, 50/60 Hz	10	10	10	10	10	10
*Motor (watts) 120V, 50/60 Hz	6	–	6	–	6	–
Humidistat (amps at 220V)	2,2	2,2	2,2	2,2	2,2	2,2
Shipping Weight (kg)	13	10	15	12	31	28
Steam Inlet & Strainer	3/4"	3/4"	3/4"	3/4"	1 1/4"	1 1/4"
Drain Connection	1"	1"	1"	1"	1 1/4"	1 1/4"
Drain Trap No.	800	800	800	800	811	811

Continuous discharge capacities, in kg of steam per hour at steam pressure indicated at the humidifier.	Orifice Size	FSA-91, VSA-91, DSA-91						FSA-92, VSA-92, DSA-92						FSA-93, VSA-93, DSA-93			
		1/16"	3/32"	1/8"	5/32"	3/16"	7/32"	7/32"	1/4"	5/16"	3/8"	7/16"	1/2"	5/16"	3/8"	7/16"	1/2"
		Steam Pressure in barg															
0,15	0,7	1,4	2,5	3,7	5,7	7,5	7,3	10	15	24	34	40	20	23	35	45	
0,30	0,9	2,1	3,7	5,7	8,5	12	11	17	27	32	43	46	29	39	49	66	
0,40	1,1	2,5	4,4	6,9	10	14	16	21	32	38	49	51	36	48	59	78	
0,60	1,4	3,2	5,6	8,8	13	17	18	24	37	47	58	64	40	53	66	90	
0,70	1,5	3,5	6,2	9,7	15	19	19	25	40	52	62	68	44	59	77	98	
0,80	1,6	3,8	6,6	10	16	20	20	27	42	56	68	75	48	64	86	110	
1,00	1,9	4,2	8,2	12	17	23	22	29	45	63	72	–	53	73	97	123	
1,40	2,5	5,4	10,4	14	21	28	24	31	49	73	–	–	62	84	112	–	
1,70	3,1	6,0	11,6	16	24	31	26	39	62	–	–	–	70	96	130	–	
2,00	3,4	6,5	12,7	18	27	34	38	46	72	–	–	–	79	108	–	–	
2,50	3,8	7,8	13,6	20	29	–	41	52	85	–	–	–	86	119	–	–	
2,75	4,2	8,7	14,8	22	32	–	44	57	–	–	–	–	94	129	–	–	
3,50	5,0	10,4	18,0	27	39	–	54	69	–	–	–	–	109	–	–	–	
4,00	5,6	11,1	20,0	29	–	–	61	77	–	–	–	–	122	–	–	–	

All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.



## Electrically-Operated “On-Off” Unit Humidifiers, continued...

(physical data, dimensions and capacities)

---

### Standard Package.

The complete “package” includes the following:

1. Humidifier with solenoid valve.
2. Fan and motor for FSA Models.
3. Standard open contact humidistat.
4. “Y” type strainer.
5. Armstrong inverted bucket trap.
6. Temperature switch to prevent “spitting” during warm-up.

### How To Order.

Specify model number, electrical characteristics, steam pressure, and orifice size.

### Suggested Specification.

Steam humidifier for electric control: Humidifier shall be of the steam separator type with full separation ahead of the control valve and with internal drying chamber and steam jacketed outlet to assure discharge of dry steam only.

- A. Humidifier shall receive steam at supply pressure.
- B. Separating chamber shall be drained by an inverted bucket steam trap.
- C. An integral stainless steel steam jacketed solenoid valve shall control flow of steam at supply pressure to the drying chamber. The drying chamber shall be filled with stainless steel silencing material. Vapor shall be discharged from the drying chamber through the steam-jacketed outlet at atmospheric pressure to provide relative humidity at the specified level.
- D. A temperature switch shall be employed to prevent humidifier from operating before cold start-up condensate is drained.